FUNHOOP Assembly Instructions:



- Please read and follow all **Safety Information**.
- Please review assembly and component **Diagrams**.
- Verify **component** & **hardware** quantities received.
- Familiarize yourself with the **installation procedures**.

Safety

- Play site ground material should only be of an approved, shock-absorbing type and meet minimum depth requirements. NEVER install playground equipment over paved or hard surfaces.
- Be sure that minimum fall zone requirements are met.
- Do not allow children to play on or near equipment which is in need or repair or replacement, is incomplete or is otherwise considered unsafe.

Parts Inventory and Set-Up

Confirm that all components and hardware are included (see *Parts List*). Gather any addition tools necessary for installation (wrench, level, tape measure, etc) Please follow diagrams and instructions in order.

1) Site location and Preparation

Be sure site is of adequate size- allow for minimum fall zones (see *Layout Diagram*). Be sure site is graded, level and free of debris for proper set-up and assembly.. Measure and mark site to determine structure location and orientation.

2) Assembly- General

Please use correct type and length fastener as shown in the installation procedure. Be sure to follow the assembly order to ease the construction procedure.

3) **Installation Procedure**

After measurement and layout of site, carefully measure for footer location. Confirm footer location- dig, pour and set footer as described in instructions.

PARTS LIST


I-FHINST-revC-1 Page 1 of 3

Hardware	Components:
T4 04	_ D

<u>Item</u>	Qty.	Description	Drawing	Part Number
НА	(1)	1/2" X 2"lg Hex Bolt		100-122HBG
	. ,	1/2" Flat Washer		100-12FWG
Steel Component:				
<u>Item</u>	Qty.	Description	Drawing	Part Number
SA	(1)	3" dia. galvanized pole		120-0001

Plast	ic (Component	:
T4	$\mathbf{\alpha}$		1


1 last	ic Con	uponent.		
<u>Item</u>	Qty.	Description	Drawing	Part Number
PA PB	` ′	molded plastic Funhoop FH Plastic Bushing	3	120-00014 100-12BUSHING
Layout	t Diagi	ram		



NOTE: Overhead views are for planning purposes only. Please follow guidelines as specified by the CPSC and ASTM F1487. **Installation procedure:**

1) Insert vertical pole (SA) Funhoop (PA). Use Hex Bolt (HA) and Washer (HB) and through-bolt Funhoop onto pole (See diagram). Tighten Hex Bolt with 3/4" wrench.

*****CRITICAL***** The Plastic Spacer (PB) MUST BE PLACED ON TOP of the Vertical Pole (SA) as shown below or warranty is voided.

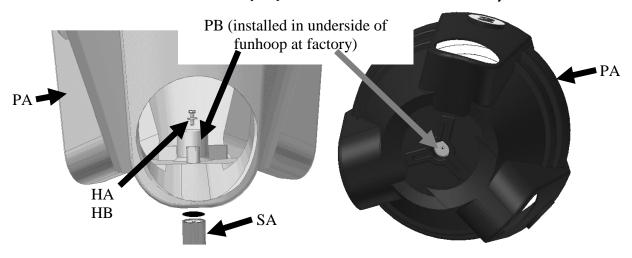


I-FHINST-revC-1 Page 2 of 3

Step 1- Pole mounting detail

When you are ready to mount the Funhoop into the ground, determine the location, measure and dig hole approx. 18" diameter by 24" deep. Mix and pour concrete into hole, leaving concrete 2" below ground level. With assistance, lower the Funhoop assembly into the concrete- securely prop Funhoop assembly with wood or similar temporary bracing structural material.

Be sure Vertical Pole is plumb and square to ground. Let Funhoop assembly remain undisturbed for (3) days minimum- until concrete has fully set. Do not allow play on or around site during this time.

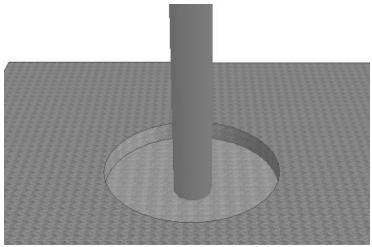

Concrete Footer - 18" dia x 24" deep

5) Finally, cover exposed concrete with dirt and tamp to ground level. Cover entire play area with an approved ground surfacing material to conform to CPSI surfacing standards.

Rev	Date	Init.	Remarks
A	12-12-05	DAH	Originated
В	4-13-10	RP	ECO-10-0004
C	5/27/14	MA	Plastic washer/spacer installed at factory.

I-FHINST-revC-1 Page 3 of 3