# **General Wood Instructions**

#### Sanding

The rule of sanding is "Never across the grain".

- 1. Do not tear sandpaper. If you do, the ragged edges will often scratch the wood surface. 2. For flat surfaces, wrap a piece of sandpaper around a block of wood or use a store bought
- holder. Start with a coarse grade of paper and finish with a fine grade of paper(not included).Be consistent. Do not sand one are with fine and another with coarse grade.

#### Staining

1. Be sure the wood surface is smooth and clean. Stains can accentuate any roughness or scratches of cross grain sanding. Wipe off any dirt or dust with a soft cloth.

2. A base coat of sealer/primer and a light sanding before applying stain will insure a uniform stain.

3. Apply stains in one direction following the wood grain. Use a soft brush or foam brush. Let the stain penetrate the wood, then wipe off excess stain with a soft cloth.

4. If stain looks too dark, dampen the cloth with water/thinner and wipe until you achieve the desired color. If stain is too light, let dry, then apply another coat of stain and wipe off. **Finishes** 

1. Outdoor projects may be finished with polyurethane or varnish.

These are toxic and must be used in a well ventilated area. Indoor projects may be finished with decoupage or left unfinished.



## Make-A-Mezuzah Item# WD3167

#### CALL TOLL-FREE 1-800-243-9232 or Mail Your Order to: S&S<sup>®</sup> Worldwide PO Box 513

Colchester, CT 06415-0513 FAX #: 1-800-566-6678 Customer Service: 1-800-937-3482 Internet home page address: http://www.ssww.com Email address: service @ssww.com


© Copyright 2007 S&S Worldwide Inc. All rights reserved. No part of this project may be copied or duplicated without the express written permission of S&S Worldwide.

Item No. WD3167

Made in China

# Make-A-Mezuzah

### PLEASE READ ALL INSTRUCTIONS BEFORE STARTING

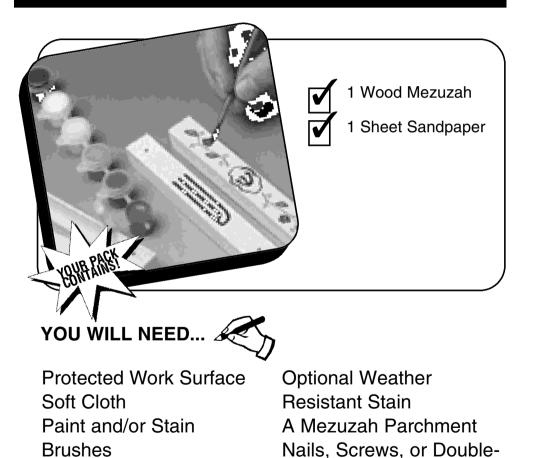

Sided Tape


**SSS**Worldwide



**Safety First!** This Product May Contain Silicon Gel Packets. REMOVE PRIOR TO USE!

## **Product Instructions:**

- Sand the mezuzah until smooth. Wipe off any excess dust with the soft cloth.
- Paint or stain the mezuzah. Let dry thoroughly. Apply finish if desired and let dry. A weather resistant finish may be used if it is to be hung outside.
- Insert the parchment into the cavity of the mezuzah. Tape the entire back of the mezuzah to secure the parchment. Hang the mezuzah with nails, screws, or double-sided tape.



A mezuzah beside the door affirms one's Jewish identity, and is a reminder of God's presence in the home.



Log on to **www.ssww.com** for paint, stain, decoupage, brushes and other decorating supplies!

Item # WD3167

